

# ChEn 374

# Fluid Mechanics

Mechanical Energy

# Spiritual Thought


Matthew 5:14-16

Ye are the light of the world. A city that is set on a hill cannot be hid.

Neither do men light a candle, and put it under a bushel, but on a candlestick; and it giveth light unto all that are in the house.

Let your light so shine before men, that they may see your good works, and glorify your Father which is in heaven.

# Fluids Roadmap

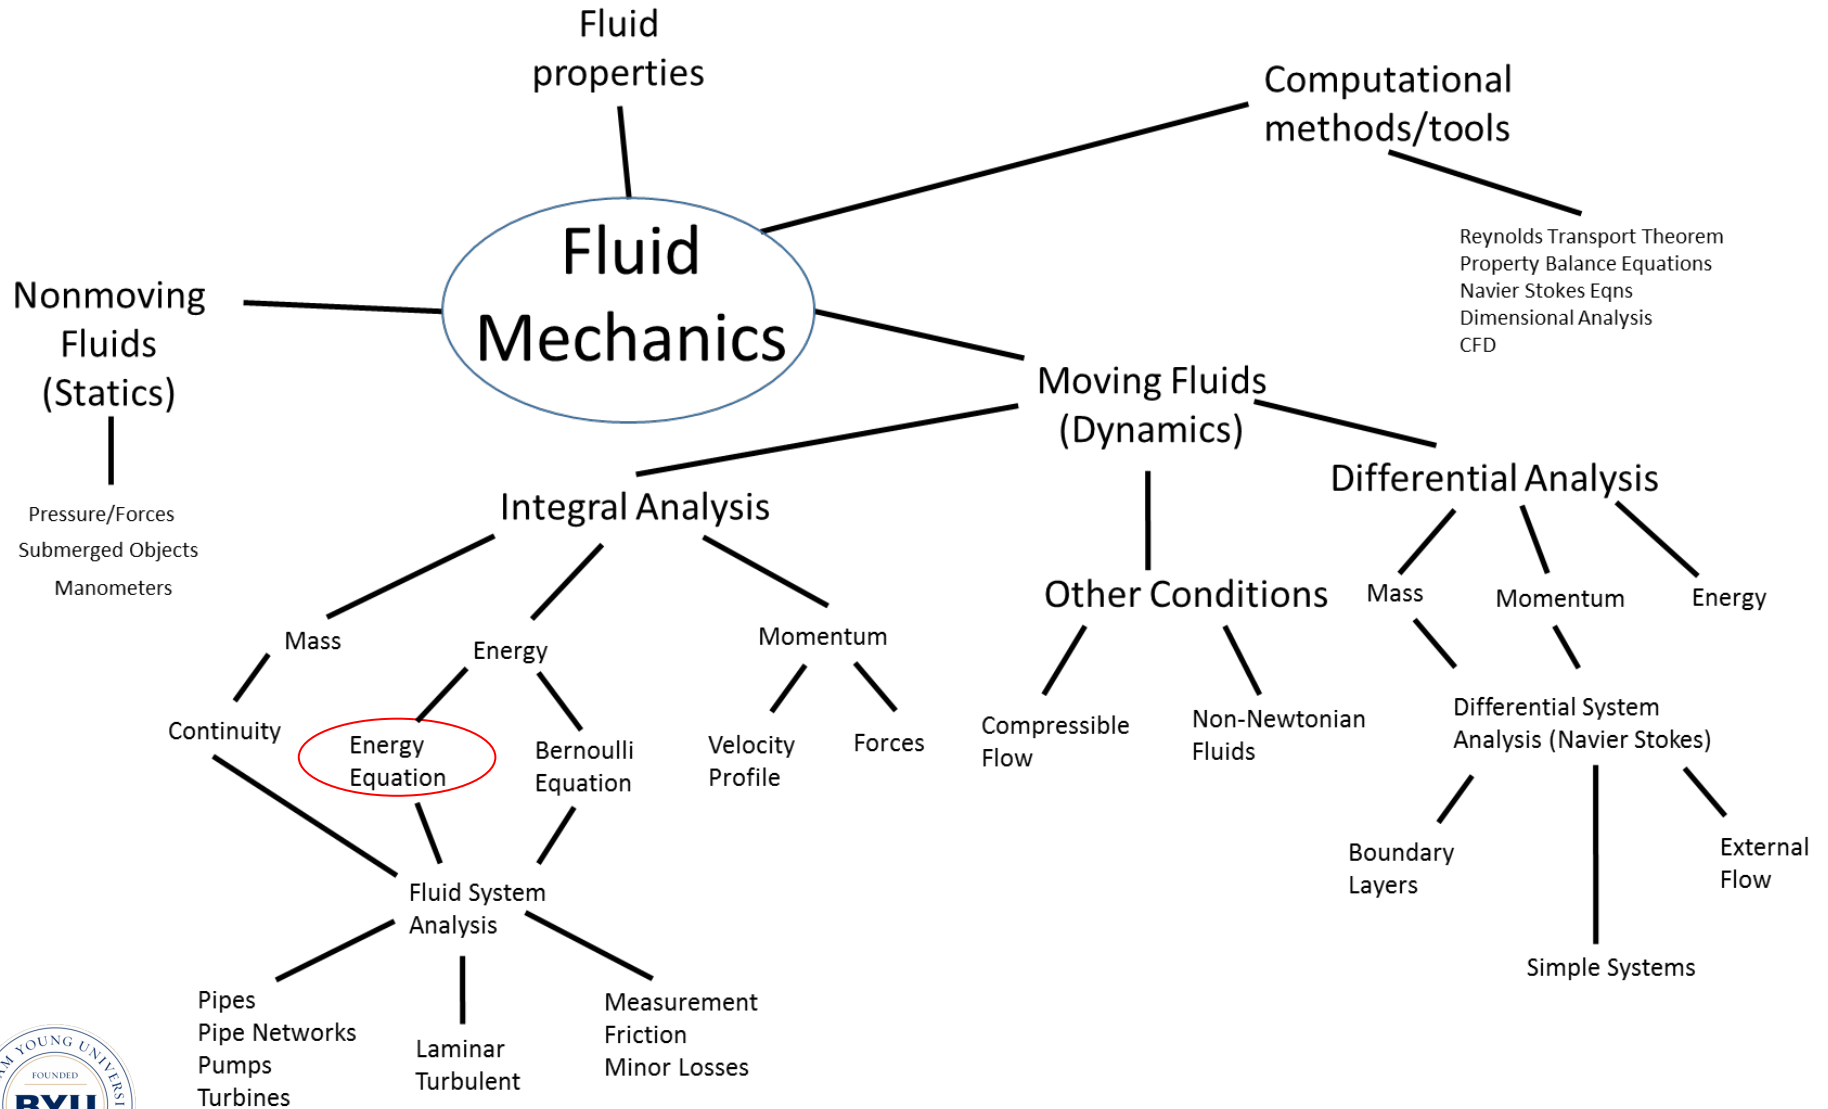

# Key Points

- Class Project
- Kinetic Energy Correction Factor ( $\alpha$ )
- Friction, Shaft work
  - F is positive
  - F decreases  $e_{\text{mech}}$
  - $$F = \dot{Q} - \dot{m}\Delta u$$
- Examples



# Kinetic Energy Correction Factor<sup>5</sup>

- Correct with a fudge factor -  $KE = \frac{1}{2} \alpha m \bar{v}^2$ 
  - $\alpha=2$  for laminar flow
  - $\alpha = 1.04 - 1.11$  for turbulent flow
- Often ignored
  - most flows turbulent
  - KE small vs p or h



# Friction/Losses

- SS Energy Equation:

$$\dot{Q} + \dot{W}_s = \dot{m}\Delta u + \dot{m} \left( \frac{P}{\rho} + \frac{v^2}{2} + g\Delta z \right)$$

– Been ignoring  $\dot{Q}, \dot{W}_s, \Delta u$ , no add  $\dot{W}_s$ , losses

- If  $\dot{Q}, \dot{W}_s, \Delta u$  are constant?

- B.E.

- Heater, no friction?

- $\dot{m}\Delta u = \dot{Q}$

- Heat goes to  $\Delta u$ !

Friction  $\rightarrow \Delta e_{\text{mech}}$  to  $\Delta u$



- Energy Eq. adjusted for friction:

$$\dot{W}_s + \underbrace{(\dot{Q} - \dot{m}\Delta u)}_{-F} = \dot{m}\Delta u + \dot{m} \left( \frac{P}{\rho} + \frac{v^2}{2} + g\Delta z \right)$$

- F is positive
- Decreases  $e_{\text{mech}}$
- Sometimes called  $\dot{E}_{\text{mech,loss}}$
- Head form:

$$\left( \frac{P}{\rho g} + \frac{v^2}{2g} + \Delta z \right) = h_w + h_L$$

- $\dot{W}_s - F = \dot{W}_u \rightarrow$  usable work



# Example 1

- Raise a Liquid





# Example 2

- Pump a liquid



# Example 3

- Nozzle



# Example 4

- Problem 5-96E in book

