

# Chemical Engineering 612

## *Introductory Nuclear Engineering*

### Lecture 12

### Core Thermal Analysis



# Spiritual Thought

“There is another way to look at your problem of crowded time. You can see it as an opportunity to test your faith. The Lord loves you and watches over you. He is all-powerful, and He promised you this: ‘But seek ye first the kingdom of God, and his righteousness; and all these things shall be added unto you.’ This is a true promise. When we put God’s purposes first, He will give us miracles. If we pray to know what He would have us do next, He will multiply the effects of what we do in such a way that time seems expanded. He may do it in different ways for each individual, but I know from long experience that He is faithful to His word.”

President Russel M. Nelson



# Thermal Parameters


- Thermal Evaluation of Core:
  - heat generation
    - Neutron Flux – Hard!
    - Fuel – Type, Number Density
    - Poisons, shim – Directly affects flux
    - $q''' = N\sigma_f\Phi_{avg}E_f = \sum_f N\Phi_{avg}E_f = \frac{W}{cm^3}$
  - pump power requirements
    - $P = \Delta P\dot{V} = \Delta P \frac{\dot{m}}{\rho}$
  - heat removal
    - $Q = \dot{m}C_p\Delta T$



# Heat Generation in Core

- Heat in core vs. heat per rod:

- $\dot{Q} = N\langle\dot{q}\rangle$
- $=NL\langle q'\rangle$
- $=NL\pi D_{co}\langle q''\rangle$
- $=NL\pi R_{fo}^2\langle q''' \rangle$

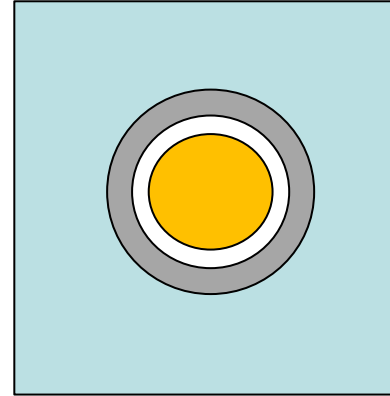

- Also need sufficient cooling!

- Pump Power =  $\Delta P \cdot A \cdot v = \Delta P \cdot \dot{V}$
- Where:  $\dot{Q}$  = core power,  $\dot{q}$  = pin power,  $A$  = flow area,  $v$  = coolant velocity,  $\dot{V}$  = coolant volumetric flow rate,

$N$  = number of fuel rods,  $L$  = rod length

$q'$  = linear heat rate,  $q''$  = heat flux

and  $q'''$  = volumetric heat rate

# 6 Basic Reactor Characteristics I

Characteristic	BWR	PWR(W)	PHWR	HTGR	AGR	LMFBR <sup>a</sup>
Reference design						
Manufacturer	General Electric	Westinghouse	Atomic Energy of Canada, Ltd.	General Atomic	National Nuclear Corp.	Novatome
System (reactor station)	BWR/6	(Sequoyah)	CANDU-600	(Fulton)	HEYSHAM 2	(Superphenix)
Moderator	H <sub>2</sub> O	H <sub>2</sub> O	D <sub>2</sub> O	Graphite	Graphite	—
Neutron energy	Thermal	Thermal	Thermal	Thermal	Thermal	Fast
Fuel production	Converter	Converter	Converter	Converter	Converter	Breeder
Fuel <sup>b</sup>						
Particles						
Geometry	Cylindrical pellet	Cylindrical pellet	Cylindrical pellet	Coated microspheres	Cylindrical pellet	Annular pellet
Dimensions (mm)	10.4D × 10.4H	8.2D × 13.5H	12.2D × 16.4H	400–800 μm D	14.51D × 14.51H	7.0 D
Chemical form	UO <sub>2</sub>	UO <sub>2</sub>	UO <sub>2</sub>	UC/ThO <sub>2</sub>	UO <sub>2</sub>	PuO <sub>2</sub> /UO <sub>2</sub>
Fissile (wt% 1st core ave.)	1.7 <sup>235</sup> U	2.6 <sup>235</sup> U	0.711 <sup>235</sup> U	93 <sup>235</sup> U	2.2 <sup>235</sup> U	15–18 <sup>239</sup> Pu
Fertile	<sup>238</sup> U	<sup>238</sup> U	<sup>238</sup> U	Th	<sup>238</sup> U	Depleted U
Pins						
Geometry	Pellet stack in clad tube	Pellet stack in clad tube	Pellet stack in clad tube	Cylindrical fuel stack	Pellet stack in clad tube	Pellet stack in clad tube
Dimensions (mm)	12.27D × 4.1 mH	9.5D × 4 mH	13.1D × 490L	15.7D × 62L	14.89D × 987H	8.65D × 2.7 mH(C) 15.8D × 1.95 mH(BR)
Clad material	Zircaloy-2	Zircaloy-4	Zircaloy-4	Graphite	Stainless steel	Stainless steel
Clad thickness (mm)	0.813	0.57	0.42	—	0.38	0.7
Assembly						
Geometry <sup>c</sup>	8 × 8 square rod array	17 × 17 square rod array	Concentric circles	Hexagonal graphite block	Concentric circles	Hexagonal rod array
Rod pitch (mm)	16.2	12.6	14.6	—	25.7	9.7 (C)/17.0 (BR)
No. rod locations	64	289	37	132 (SA)/76 (CA) <sup>d</sup>	37	271 (C)/91 (BR)
No. fuel rods	62	264	37	132 (SA)/76 (CA) <sup>d</sup>	36	271 (C)/91 (BR)
Outer dimensions (mm)	139	214	102D × 495L	360F × 793H	190.4 (inner)	173F
Channel	Yes	No	No	No	Yes	Yes
Total weight (kg)	273	—	—	—	342	—

Source: Knief [4] except AGR HEYSHAM 2.

# 6 Basic Reactor Characteristics II

Characteristic	BWR	PWR(W)	PHWR	HTGR	AGR	LMFBR
<b>Core</b>						
Axis	Vertical	Vertical	Horizontal	Vertical	Vertical	Vertical
No. of assemblies						
Axial	1	1	12	8	8	1
Radial	748	193	380	493	332	364 (C) 233 (B)
Assembly pitch (mm)	152	215	286	361	460	179
Active fuel height (m)	3.81	3.66	5.94	6.30	8.296	1.0 (C) 1.6 (C)
Equivalent diameter (m)	4.70	3.37	6.29	8.41	9.458	3.66
Total fuel weight (ton)	156 UO <sub>2</sub>	101 UO <sub>2</sub>	98.4 UO <sub>2</sub>	1.72 U 37.5 Th	113.5 UO <sub>2</sub>	32 MC
<b>Reactor vessel</b>						
Inside dimensions (m)	6.05D × 21.6H	4.83D × 13.4H	7.6D × 4L	11.3D × 14.4H	20.25D × 21.87H	21D ×
Wall thickness (mm)	152	224	28.6	4.72 m min	5.8 m	25
Material <sup>b</sup>	SS-clad carbon steel	SS-clad carbon steel	Stainless steel	Prestressed concrete	Concrete helical prestressed	Stainless
Other features			Pressure tubes	Steel liners	Steel lined	Pool type
Power density core average (kW/L)	54.1	105	12	8.4	2.66	280
Linear heat rate						
Core average (kW/m)	19.0	17.8	25.7	7.87	17.0	29
Core maximum (kW/m)	44.0	42.7	44.1	23.0	29.8	45
<b>Performance</b>						
Equilibrium burnup (MWD/T)	27,500	27,500	7500	95,000	18,000	100,000
Average assembly residence (full-power days)			470	1170	1320	
Refueling						
Sequence	¼ per yr	½ per yr	Continuous on-line	¼ per yr	Continuous on-line	Variable
Outage time (days)	30	30		14–20		32

Source: Knief [3], except AGR data are from Alderson [1] and Debenham [2].

<sup>a</sup>LMFBR: core (C), radial blanket (BR), axial blanket (BA).

<sup>b</sup>SS = stainless steel.

# Best Estimate and Uncertainties

- Best Estimate
  - Most likely value
  - Do we know this?
  - Are we sure of all dependent values?
- Propagation of Uncertainties
  - (UO Lab) designed to give range of possible values
- Once distribution given, used to develop margin



# Thermal Design Margins

